


Load Haul Dump Vehicles

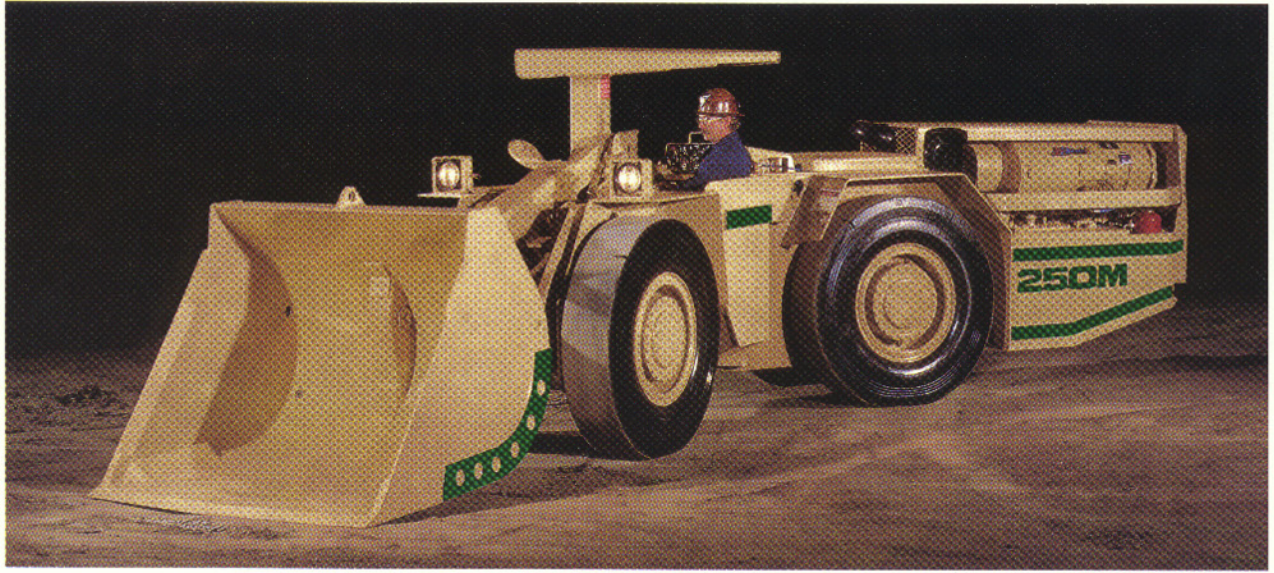

250M–300M Series LHD

Standard Features

- 7,500–9,000 lbs. (3,409–4,090 kg) Rated Load Capacity
- 2.5–3.0 yd³ (1.9–2.3 m³) Bucket Capacity
- 16,870 lbs. (7,668 kg) Breakout Force
- 61"–68" (1.55–1.73 m) OA Width
- Heavy Duty Powertrain
- Deutz F5L-413-FRW Engine
- Clark C270 Series Torque Converter
- Clark Modulated 32,000 Series Transmission
- Clark 14D Planetary Drive Axles with Wet Disc Service Brakes
- Trunnion Mounted Rear Axle Oscillation
- Load Sensing Variable Displacement Hydraulics
- Full Flow Pressure and Return 10 Micron Hydraulic Filtering
- Extended Boom Reach for Truck Loading
- Largest Operator Compartment in Its Class



**MINING TECHNOLOGIES
INTERNATIONAL INC.**

Innovative technologies. Unparalleled support

Performance Specifications

Rated Load Capacity

250M	7,500 lbs. (3,409 kg.)
300M	9,000 lbs. (4,090 kg.)

Standard Bucket Capacity



Semi-Nominal Heaped	
250M	2.5 yd ³ (1.91 m ³)
300M	3.0 yd ³ (2.30 m ³)
Struck	
250M	2.1 yd ³ (1.60 m ³)
300M	2.4 yd ³ (1.83 m ³)

Maximum Breakout Force (bucket roll back)

250M	21,210 lbs. (9,641 kg.)
300M	16,870 lbs. (7,668 kg.)

Operating Weight (empty)

250M	26,000 lbs. (11,818 kg.)
300M	26,450 lbs. (12,023 kg.)

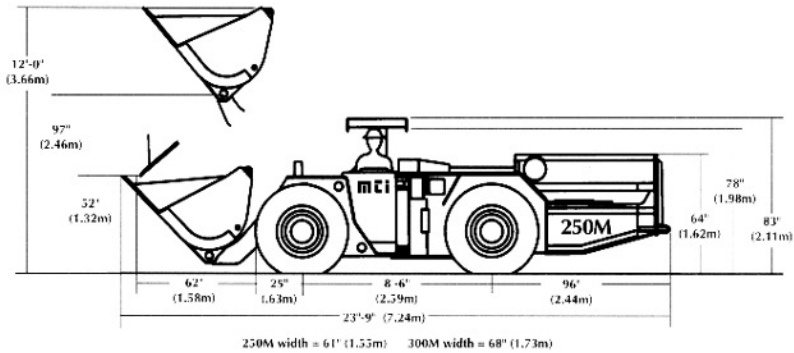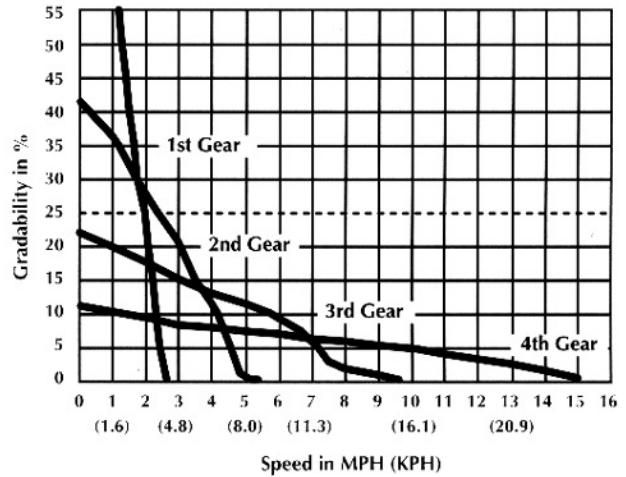

**MINING TECHNOLOGIES
INTERNATIONAL INC.**

250M – 300M Series LHD

Head Office:

P.O. Box 2097, Station A
Sudbury, Ontario, Canada
P3A 4R8
145 Magill Street
Lively, Ontario, Canada
P3Y 1K6
Telephone: (705) 692-3661
Fax: (705) 692-4850

Canadian Sales Office:

P.O. Box 2845, Station A
Sudbury, Ontario, Canada
P3A 5J3
25 Fielding Road
Lively, Ontario, Canada
P3y 1L7
Telephone: (705) 682-0623
Fax: (705) 682-4508
Toll free: (Canada & U.S.A.)
1-800-461-4094

U.S. Sales Office:

4955 Bannock Street
Denver, Colorado 80216
Telephone: (303) 892-5800
Fax: (303) 892-1408
Toll free: (Canada & U.S.A.)
1-800-659-4955

International Sales Office:

4955 Bannock Street
Denver, Colorado 80216
Telephone: (303) 892-5800
Fax: (303) 892-2830
Toll free: (Canada & U.S.A.)
1-800-659-4955

South Africa:

P.O. Box 4081
Dalpark 1543, S.A.
25 Soetdoring Str. Dalpark
Brakpan, 1540
Republic of South Africa
Telephone: 27-11-915-2770
Fax: 27-11-915-8330


Australia & South East Asia:

26-42 Cooper Road
Jandakot 6164, W.A.
Australia
Telephone: 61-9-417-8488
Fax: 61-9-417-8747



Authorized Representative



Load Haul Dump Vehicles

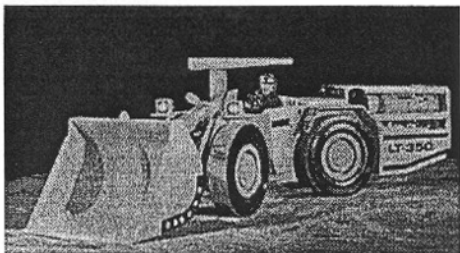

LT-350

Standard Features

- 7,500 (3,409kg.) Rated Load Capacity
- 2.5-3.0 yd³ (1.9-2.3 m³) Bucket Capacity
- 16,870 lbs. (7,668 kg.) Breakout Force
- 61" (1.55 m) OA Width
- Heavy Duty Powertrain
- Deutz BF4M1013C Engine
- Clark C270 Series Torque Converter
- Clark Modulated R32000 Series Transmission
- Clark 14D Planetary Drive Axles with Wet Disc Service Brakes
- Trunnion Mounted Rear Axle Oscillation
- Load Sensing Variable Displacement Hydraulics
- Full Flow Pressure and Return 10 Micron Hydraulics Filtering
- Extended Boom Reach for Truck Loading
- Largest Operator Compartment in Its Class

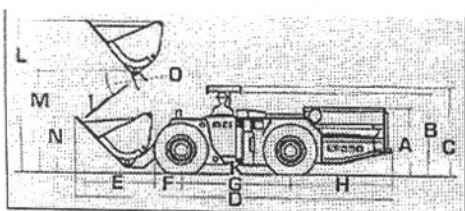

Dimensions	A	B	C	D	E	F	G	H	K
Inches	64	70	83	285	62	25	105	96	9
Millimeters	1625	1980	2110	7240	1575	635	2590	2440	229

Dimensions	L	M	N	O	P	R	S	T
Inches	144	97	52	43	206	115	40	61
Millimeters	3660	2465	1320	43	5230	2920	40	1549

Technical Specifications

Rated Load Capacity

7,500 lbs.
(3,409 kg.)

Standard Bucket Capacity

Semi Nominal Heaped
2.0-2.5 yd³
(1.54-1.91 m³)

Maximum Breakout Force

16,870 lbs.
(7,668 kg.)

Operating Weight (empty)

26,000 lbs.
(11,818 kg.)

Engine

Deutz BF4M1013C

Torque Converter

Clark C270

Transmission

Clark R32000

Axels

Clark 14D

Tires

12.00x24



Innovative technologies. Unparalleled support.