



PNEUMATIC ROCKDRILLS


DIAMOND DRILLS

REPLACEMENT PARTS

PARTS HEADQUARTERS INC.

1175 Appleby Line, Unit C2, Burlington, Ontario, Canada L7L 5H9 Phone 905-332-3271 Fax 905-332-9497 Email info@partshq.com

PHQ36-Independent Rotation Drill

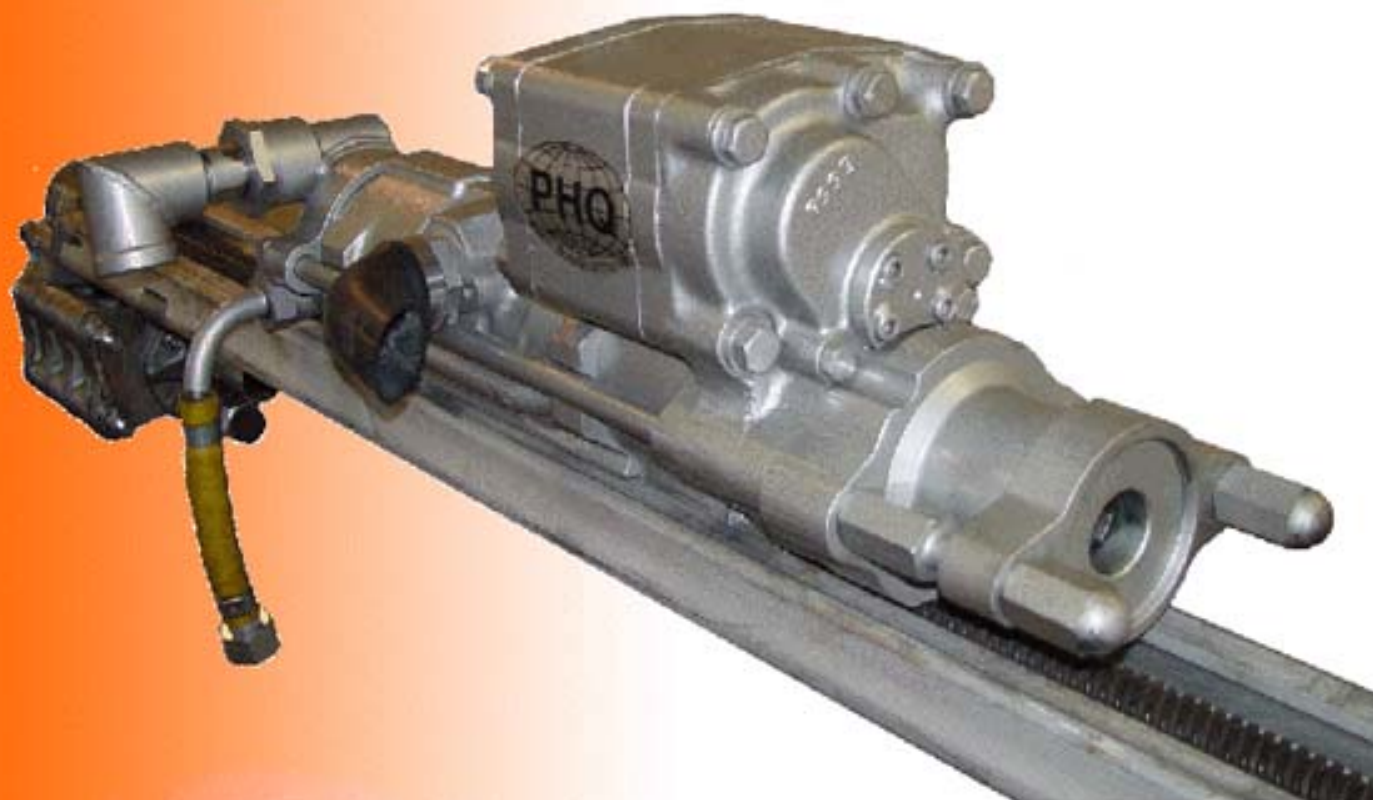

PHQ36-IR Drill

This dependable, powerful pneumatic production rock drill is recommended for long-hole drilling in underground hard rock mining applications.

*Fast penetration drilling hole sizes from 38mm to 102mm
sizes from 1 ½ inch to 4 inches
up to 120 meters in depth
up to 400 feet in depth.*



ISO 9001:2000

Certificate: 002485
SIC 5082

www.partshq.com

Features

Large mating faces on components bodies for less wear and longer life

The new Front End Bolt on End Cap with Adapter Studs makes it easier and faster to exchange drill shanks.

Shorter side rods provide increased rigidity to the assembly of the drill components preventing movement.

PHQ36-IR Specifications

CYLINDER BORE

4½ inches – 114mm

CYLINDER STROKE

3⅜ inches – 88mm

AIR CONSUMPTION

180cfm @70psi – 14cu m/m @500kPa

BLOWS PER MINUTE

1630bpm @ 70psi – 1630bpm @500kPa

SHANK SIZE

1¼ inch - 44mm Four Spline

DRILL AIR CONN HOSE SIZE


1¼ inch bsp 1¼ inch – 44mm

ROTATION AIR CONN HOSE SIZE

1 Inch bsp 1 inch – 25mm

THE PHQ36-IR drill is available mounted on Aluminum Feed assemblies for four foot or six foot drill steel change. The assembly is completed with a PHQ10S Centralizer and five lever PHQ21002 Remote Control Panel.

PHQ36-IR Drill

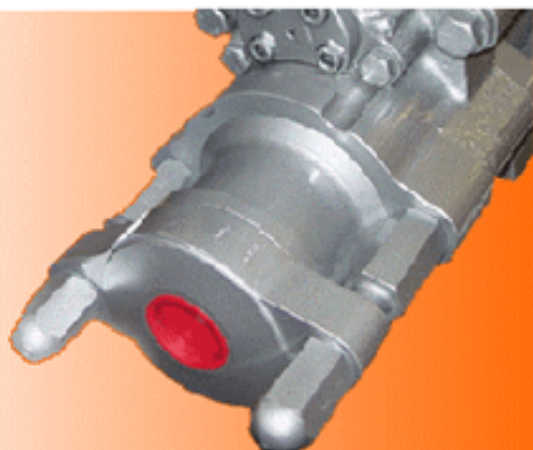

PHQ carries a full range of parts for the PHQ36-IR drill in stock.

Parts made in Canada to precise specifications using only the highest quality tool steel